

Visit Our Web Site at [www.usindustrial.com](http://www.usindustrial.com)

**ONE (1) NEW U.S. INDUSTRIAL 16" X 60" PRECISION GEARED HEAD ENGINE LATHE  
MODEL USL1660 *Spindle bore will pass 3"***

This precision, **heavy duty geared head engine lathe** incorporates hardened and precision ground bedways on longitudinal and cross ways, and wide, precision ground gears. It has a gap-bed design, feed-rod/lead screw safety interlock system, weight bearing tailstock and forward/reverse levers at both the aprons and the head stock.

As with all U.S. Industrial lathes, it comes with a plethora of standard accessories, 3 and 4-jaw chucks, follower and steady rests, work lamp, a coolant system and an operator/service manual.


**Standard Equipment: (Items below are INCLUDED with the machine)**

- 10" 3-Jaw Chuck. Universal, Self-centering
- 12" 4-Jaw Independent Chuck
- Steady Rest
- 4-Way Toolpost
- Micrometer Carriage Stop
- Thread Dial
- Work Lamp
- Flood Coolant System

- Sino 2-Axis digital readout inch/metric

- Safety Chuck Shield

- Inch /Metric Reading Dials on Apron, Cross-Slide

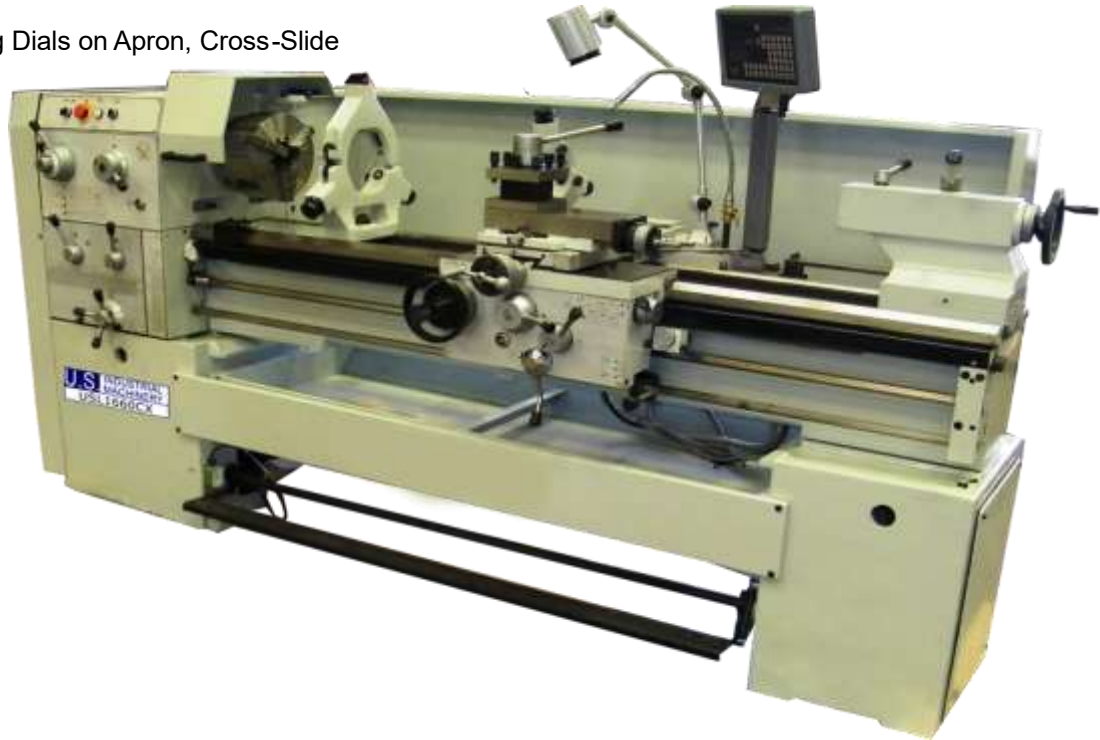

**(installed)**

- Taper Attachment **(installed)**

## **U.S. INDUSTRIAL MACHINERY**

P.O. BOX 2098

MEMPHIS, TN 38101

PHONE: (800) 860-1850

FAX: (901) 526-2339 Visit

Our Web Site at [www.usindustrial.com](http://www.usindustrial.com)

and Compound

- 15" Face Plate & Dog Plate
- Foot Brake with microswitch
- Follow Rest

- Large Spindle Bore to pass 3"
- Full Length Backsplash
- Slide out Chip Pan

• Manual with test certificate **Specifications and important information:**

Swing Over Bed	Dimensions
Swing Over Cross-Slide	16.53" (420mm)
Swing Over Gap	8.85" (225mm)
Gap Length	21.65" (550mm)
Maximum Workpiece Length	10.23" (260mm)
Spindle Bore	59.05" (1500mm)
Spindle Type	3.15" (80mm)
15 Spindle Speeds	D1-8 Camlock
66 Longitudinal Feeds	24 to 1600 RPM
66 Cross Feeds	.0027 to .15 IPR
66 Metric Threads	.00135 to .075 IPR
66 Inch Threads	0.5 to 28mm
33 Module Threads	1 to 56 TPI
33 Diametral Pitch Threads	0.5 to
Compound Rest Travel	3.5mm
Cross-Slide Travel	8 to 56
Tailstock Taper	DP
Tailstock Spindle Travel	5.119" (130mm)
Main Motor HP	12" (305mm)
Coolant Pump Motor	No. 5 Morse Taper
Lathe Gross Weight	4.72" (120mm)

**AVAILABLE OPTIONS:**

Quick Change Toolpost Kit with Holders.....	<b>(QCTP13-16)</b>
ISO Cutting Tool Package.....	<b>(ISOSET16)</b>

We await your reply and thank you for this opportunity to quote.

Sincerely,

U.S. INDUSTRIAL MACHINERY

## U.S. INDUSTRIAL MACHINERY

P.O. BOX 2098

MEMPHIS, TN 38101

PHONE: (800) 860-1850

FAX: (901) 526-2339

Visit Our Web Site at [www.usindustrial.com](http://www.usindustrial.com)

*Detail of Headstock, chuck and guard*

*Detail of Apron, digital readout and tailstock*



### **QUICK CHANGE TOOLPOST OPTION – (Replaces standard four-way toolpost)**

Thank you for the opportunity to quote. We are pleased to offer the following equipment for your consideration:

**ON E – NEW QUICK CHANGE TOOLPOST WITH FIVE HOLDERS, FOR FACTORY ONLY INSTALL ON USL SERIES LATHES**

**Note: We use the wedge style, #333 for our Lathes. This comes with Part off holder, knurling holder, boring bar holder, and two 3/4" SS holders**

**This is custom installation AND not available after machine ships. Must be installed on lathe at time of order, prior to shipping.**

**QUICK CHANGE QC TOOL POST SETS**

Phase II quick change QC tool post sets advanced design provides built-in quick tool changing versatility with positive rigidity to meet the most exacting working tolerances.

Quickly and easily installed on an engine bench or barrel lathe Phase II quick change QC tool post sets perform a wide range of operations from fine precision work to heavy duty turning.

All parts are hardened, ground and completely sealed for maintenance free operation.

Maximum rigidity for chatter free performance.

Phase II quick change QC tool post sets are interchangeable with all industry leading brands by series.

**EACH SET CONSISTS OF ONE TOOLPOST AND 5 HOLDERS, ONE OF EACH STYLE, #1, 2, 4, 7 AND 10.**

**FISTON TOOLPOST SETS**

STOCK #	SWING
291-100	9-12"
291-200	10-13"
291-300	13-18"
291-400	18-20"

**WEDGE TOOLPOST SETS**

STOCK #	SWING
291-111	9-12"
291-222	10-13"
291-333	13-18"
291-444	14-20"
291-555	17-20"

**Quick Change QC Tool Post Features:**

- No chatter or vibration
- Quick swap of tools
- No Shims
- Guaranteed Repeatability

[Back to Product Listing](#)

	Stock No.	A	B	C	D	E	H	R	Swing
Fiston Style	290-100	2 1/2"	3 7/8"	2 1/4"	9/16"	1 7/16"	4 11/16"	5 3/4"	9-12"
	290-200	3"	4 5/8"	2 3/4"	5/8"	1 5/8"	3 9/16"	7 5/16"	10-13"
	290-300	3 3/8"	5 1/8"	3"	3/4"	1 7/8"	4 1/8"	7 7/8"	13-18"
	290-400	4"	6 1/4"	3 5/8"	7/8"	2 1/8"	5"	9"	18-20"
Wedge Style	290-111	2 1/2"	3 7/8"	2 1/4"	9/16"	1 5/8"	4 11/16"	5 3/4"	9-12"
	290-222	3"	4 5/8"	2 3/4"	5/8"	1 5/8"	3 9/16"	7 5/16"	10-13"
	290-333	3 1/2"	5 1/8"	3"	3/4"	1 29/32"	4 1/8"	7 7/8"	13-18"
	290-444	4"	6 1/4"	3 5/8"	7/8"	2 1/8"	5"	9"	14-20"
	290-555	5"	7 3/8"	4 5/8"	1"	2 11/16"	-	-	17-20"

## Cutting Tool Package for U.S. Industrial Lathes:

This optional cutting tool package is designed to fit our QUICK CHANGE TOOLPOST option. It is not for the standard 4-way toolpost.

Tools included below are for:

- Rough and medium finishing of the part OD.      Fine finish of the part ID
- Left- and right-hand tools for working left and right hand shoulders
- Tools for threading OD and ID      Tools for boring the ID
- Part off tools And more.....

List of carbide cutting tools in KIT for US INDUSTRIAL LATHE: (ISO tools are imports.)

Note: Tools for 13", 16", 20" and 26" Lathes will be 3/4" square shank

Note: Customer MUST purchase option, OUR QC Toolpost set for install prior to shipping:

1. MW LN-R, 3/4" square, triangle insert, right hand.....
2. MW LN-L, 3/4" square, triangle insert, left hand.....
3. Box of 10 W NMG inserts for above.....

4. MCLN-R, 3/4" square, diamond insert, right hand.....
5. MCLN-L, 3/4" square, diamond insert, left hand.....
6. Box of 10 CNMG inserts for above.....
  
7. MVJN-R, 3/4" square, diamond insert, fine finish, right hand.....
8. MVJN-L, 3/4" square, diamond insert, fine finish, left hand.....
9. Box of 10 VNMG inserts, 1/64" nose radius.....
  
10. SER-0750-SET, 3/4" square, for threading OD, with inserts.....  
(This is a KIT and includes threading inserts.)
  
11. SIR-0750-SET, 3/4" round, for threading ID, with inserts.....  
(This is a KIT and includes threading inserts.)
  
12. SCLCR-SET, Boring bars, .315", 3/8", 1/2", 5/8", 3/4" bars, with inserts..... (This is a KIT and includes inserts.)
  
13. RH-MCLN, Boring bar, 1" diameter, 12" long.....
14. Use inserts in Item No. 6, CNMG.....
  
15. HSS Blade for part-off holder, high speed steel..... Block, blade and 10 self-lock carbide parting/grooving inserts.....
  
16. Arbor and key chuck for tailstock.....
17. Live center for tailstock.....
18. Semi-synthetic coolant concentrate, 1 gallon.....